



MARK	DATE	DESCRIPTION	DESIGN

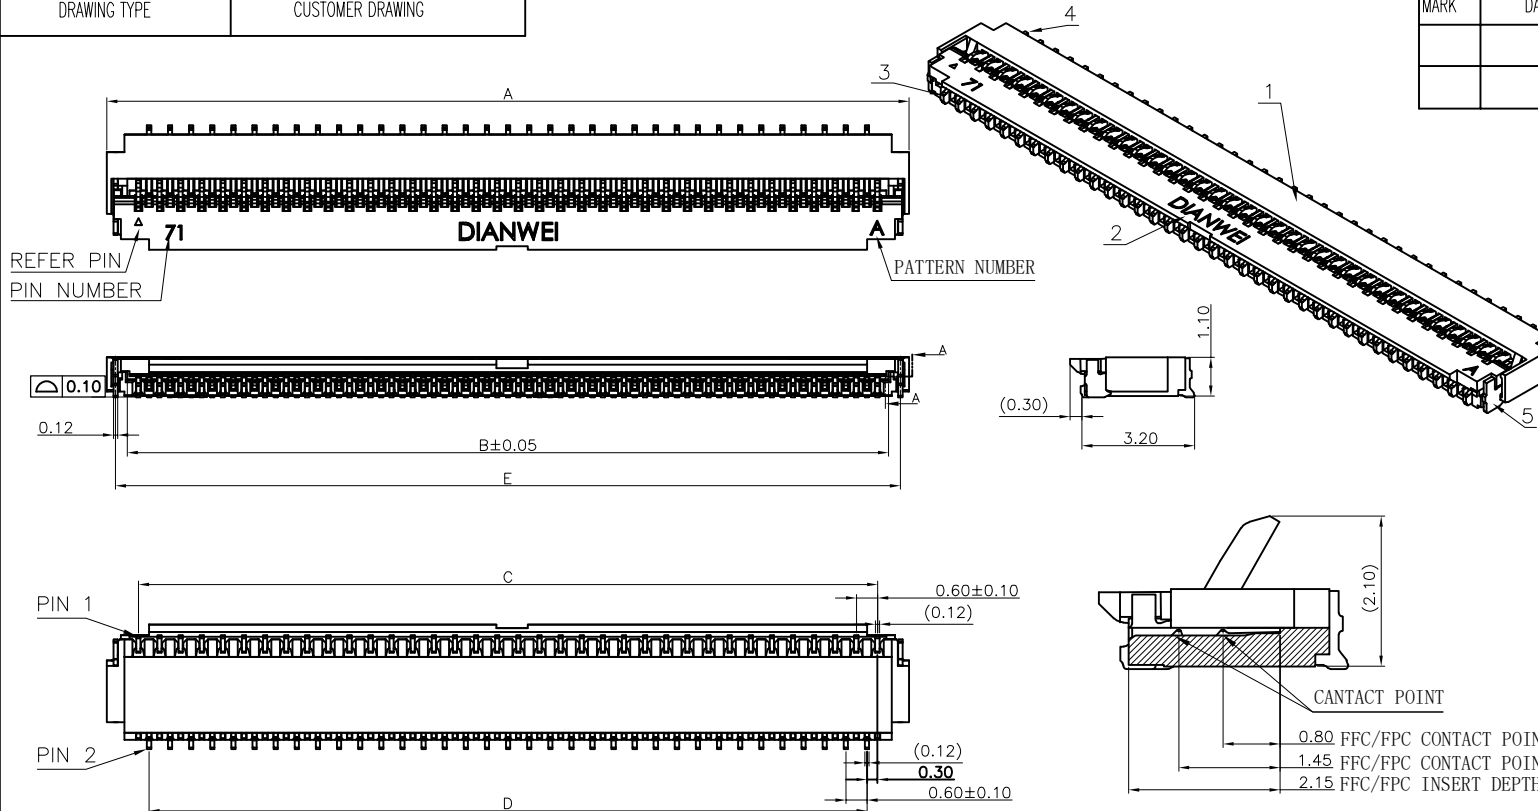

1. PART NO. LEGEND:  
8.26A0 . \*\*\* 2 0 0  
① ② ③ ④ ⑤
1. 1. SERIES NAME: 8.26A0=0.3MM FFC/FPC DUAL CONTACT SIDE CONNECTOR (H=1.1mm)  
1. 2. CONTACT PIN NUMBER: \*\*\*=CONTACT PIN NUMBER  
1. 3. CONTACT AREA PLATING SPEC: GOLD PLATING: 2=1~3u"; 3=5u"; 4=10u"; 5=15u"  
SOLDER AREA PLATING SPEC: GOLD PLATING: 2=1~3u"; 3=5u"; 4=10u"; 5=15u"  
1. 4. UNSPECIFIED: 0=NONSENSE  
1. 5. UNSPECIFIED: 0=NONSENSE
2. PERFORMANCE:  
2. 1. CURRENT RATING: 0.2A/PIN.  
2. 2. VOLTAGE RATING: 30V (AC/DC).  
2. 3. CONTACT RESISTANCE: INITIAL VALUE 100mOHM Max,  
2. 4. INSULATION RESISTANCE: 50mOHM Min.  
2. 5. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE;  
2. 6. DURABILITY: 20 TIMES Min.  
2. 7. OPERATING TEMPERATURE: -40°C~+85°C  
OPERATING HUMIDITY RANGE: 20% TO 85%

Pin Number	Part Number	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
13	8.26A0.013200	5.40	4.23	3.60	3.00	4.90	4.20
15	8.26A0.015200	6.00	4.83	4.20	3.60	5.50	4.80
17		6.60	5.43	4.80	4.20	6.10	5.40
19	8.26A0.019200	7.20	6.03	5.40	4.80	6.70	6.00
21	8.26A0.021200	7.80	6.63	6.00	5.40	7.30	6.60
23		8.40	7.23	6.60	6.00	7.90	7.20
25	8.26A0.025200	9.00	7.83	7.20	6.60	8.50	7.80
27	8.26A0.027200	9.60	8.43	7.80	7.20	9.10	8.40
29		10.20	9.03	8.40	7.80	9.70	9.00
31	8.26A0.031200	10.80	9.63	9.00	8.40	10.30	9.60
33		11.40	10.23	9.60	9.00	10.90	10.20
35	8.26A0.035200	12.00	10.83	10.20	9.60	11.50	10.80
37		12.60	11.43	10.80	10.20	12.10	11.40
39	8.26A0.039200	13.20	12.03	11.40	10.80	12.70	12.00
41		13.80	12.63	12.00	11.40	13.30	12.60
45	8.26A0.045200	15.00	13.83	13.20	12.60	14.50	13.80
51	8.26A0.051200	16.80	15.63	15.00	14.40	16.30	15.60
57	8.26A0.057200	18.60	17.43	16.80	16.20	18.10	17.40
61	8.26A0.061200	19.80	18.63	18.00	17.40	19.30	18.60
71		22.80	21.63	21.00	20.40	22.30	21.60

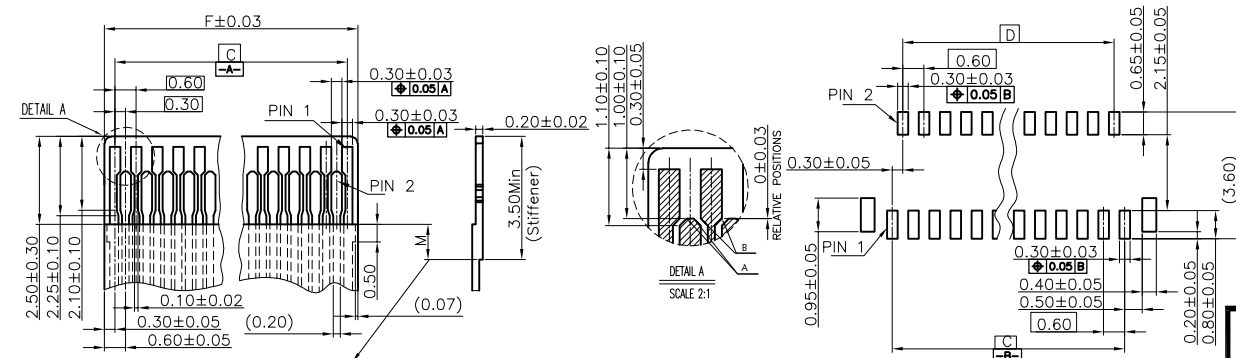

Dimension M must be 0.5mm minimum when the stiffener than 3.50mm  
RECOMMENDED FPC

NO.	COMPONENTS	MATERIALS	FINISH/COLOR	SPECIFICATION	QUANTITY
5	STATOR	PHOSPHOR BRONZE	Sn		2
4	TERMINAL II	PHOSPHOR BRONZE			POSITIONS
3	TERMINAL I	PHOSPHOR BRONZE			POSITIONS
2	COVER	THERMOPLASTIC UL94V-0	BLACK		1
1	HOUSING	THERMOPLASTIC UL94V-0	NATURAL		1

**DIANWEI** 东莞市钿威电子科技有限公司  
DONGGUAN DIANWEI ELECTRONIC TECHNOLOGY CO., LTD  
Tel: +86-769-8788 8322 Fax: +86-769-8788 8321 E-mail: sales@dianwei.cn Http://www.dianwei.cn

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.30
.XX	±2.0°	.XX	±0.20
.XXX	±1.0°	.XXX	±0.10


APPROVED	VERIFIED	DESIGN	DRAWING NO	PART NAME:	0.3MM FFC/FPC SWING COVER CONNECTOR(H=1.1mm)			
			8.26A0-C	PART NO.	8.26A0.***200			
				DATE	UNITS	SCALE	PAGE	REV
				2023.08.07	mm	1:1	1/1	A

NOTE: ALL RIGHTS RESERVED, BANNED COPY!


DRAWING TYPE PACKAGE DRAWING

MARK	DATE	DESCRIPTION	DESIGN

PULL OUT DIRECTION

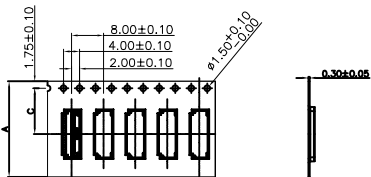

9~45PIN REEL

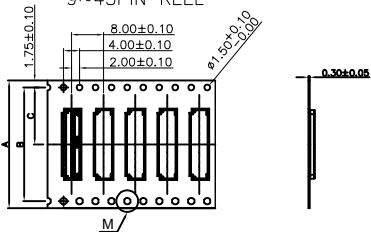


47~71PIN REEL

NOTES:


- MATERIAL:
  - CARRY TAPE:HIPS,T=0.30±0.05mm,CLEAR
  - REEL:HIPS,
  - SHIM:PE,CLEAR.
- PRIMARY PACKING:3000PCS/REEL.
- SECONDARY PACKING:SEE PACKING LIST
- PEELING RESISTANCE: 0.1~1.3N(10~130gf); PEELING ANGLE: 165°~180°; PEELING SPEED: 300mm/minutes.

每盘使用PE带真空包装


TOTAL N LAYERS

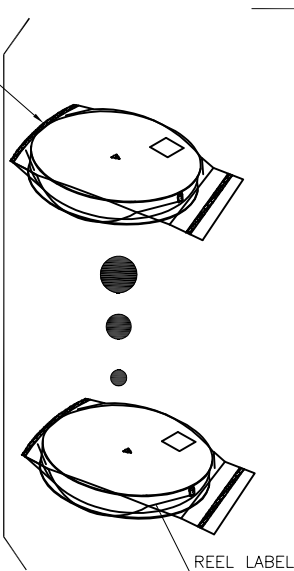


REEL LABEL



TRANSPARENT GULE TAPE




SIDE LABEL

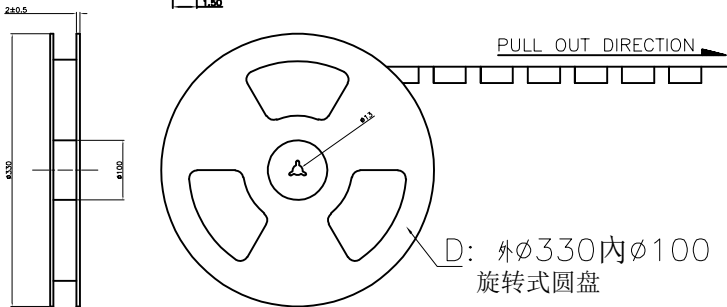

D: 外φ330内φ100 旋转式圆盘

PULL OUT DIRECTION



TAIL PART (EMPTY) COMPONENT SUPPLIER LEADER PART (EMPTY)

6. QTY. LIST:

NO. OF POS.	A	B	C	PCS/REEL
9~19 PIN	16.0	—	7.5	3000
21~45 PIN	24.0	—	11.5	3000
47~61 PIN	32.0	28.4	14.2	3000
71 PIN	44.0	40.4	20.2	3000

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.30
.XX	±2.0°	.XX	±0.20
.XXX	±1.0°	.XXX	±0.10

# DIANWEI

DONGGUAN DIANWEI ELECTRONIC TECHNOLOGY CO.,LTD

Tel: +86-769-8788 8322 Fax: +86-769-8788 8321 E-mail: sales@dianwei.cn Http://www.dianwei.cn

## 东莞市钿威电子科技有限公司

APPROVED	VERIFIED	DRAWING NO	PART NAME: 0.3mm FFC/FPC DUAL CONTACT SIDE CONNECTOR(H=0.9mm)PACKAGE SPEC				
		8.26A*-P	PART NO. 8.26A*.***200				
		DESIGN	DATE	UNITS	SCALE	PAGE	REV
		CHEN	2023.08.07	mm	1:1	1/1	A

NOTE: ALL RIGHTS RESERVED,BANNED COPY!